


TI III: Operating Systems & Computer Networks I/O and File System

Prof. Dr.-Ing. Jochen Schiller Computer Systems & Telematics Freie Universität Berlin, Germany



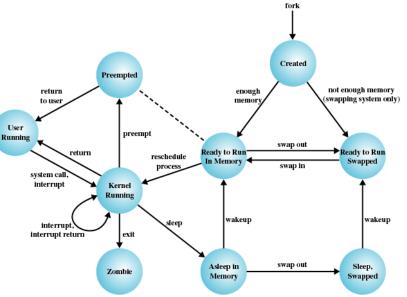


Content

- 1. Introduction and Motivation
- 2. Subsystems, Interrupts and System Calls
- 3. Processes
- 4. Memory
- 5. Scheduling
- 6. I/O and File System
- 7. Booting, Services, and Security



Operating System Design and I/O

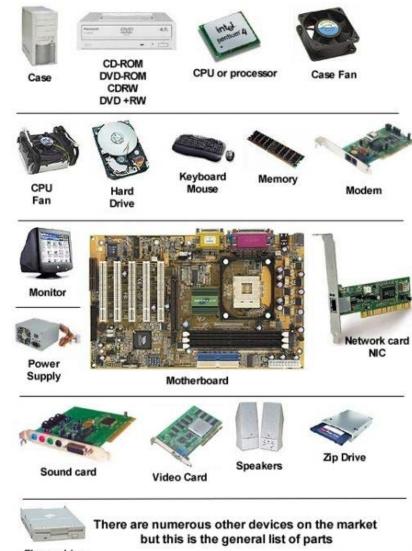



Operating System Design and I/O

Efficiency Problems

- I/O (usually) cannot keep up with processor speed
- Use of multiprogramming allows for some processes to be waiting on I/O while another process executes
- Most I/O devices extremely slow compared to main memory
- Swapping is used to bring in additional Ready processes (requires I/O operations)

Generality

- Desirable to handle all I/O devices in a uniform manner, i.e., provide good abstraction to application programmer
- Hide most of details of device I/O in lower-level routines
 - >Processes and upper levels see devices in general terms, e.g., read, write, open, close, lock, unlock


➤Conflicting goals motivate focus on API design



Types of I/O Devices

Wide variety of I/O devices

- Human readable, e.g., display, keyboard, mouse
- Machine readable, e.g., disk and tape drives, sensors, controllers, actuators
- Communication, e.g., digital line drivers, modems

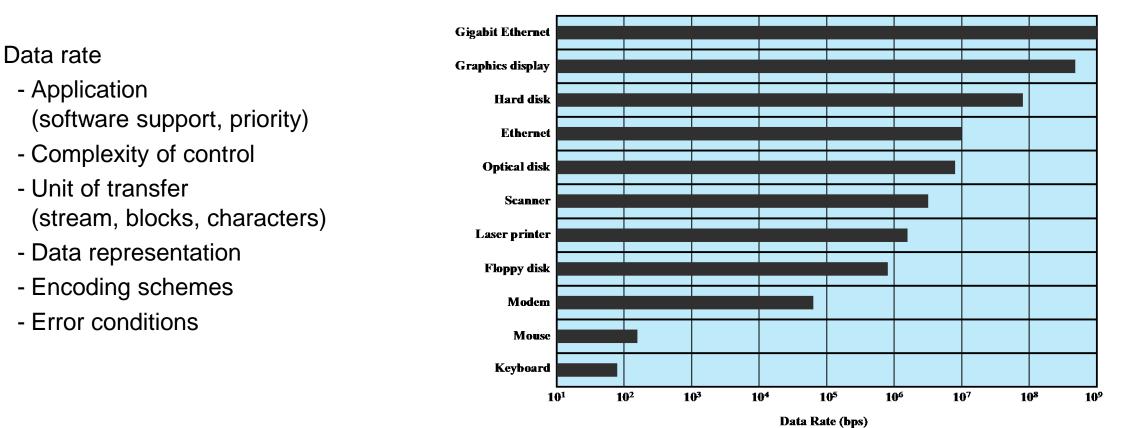



Alternatives for I/O Organization

Device abstraction


- Character-based I/O
 - E.g. input devices like keyboard or mouse
- Block-based I/O
 - E.g. data storage
- ≻Not necessarily related to implementation, e.g. USB

Communication endpoint (socket) abstraction

- Used for networking
- ➤Second part of this lecture

File abstraction

- Structured, persistent storage
- Sometimes with additional semantics, e.g., locking, transaction support, etc.

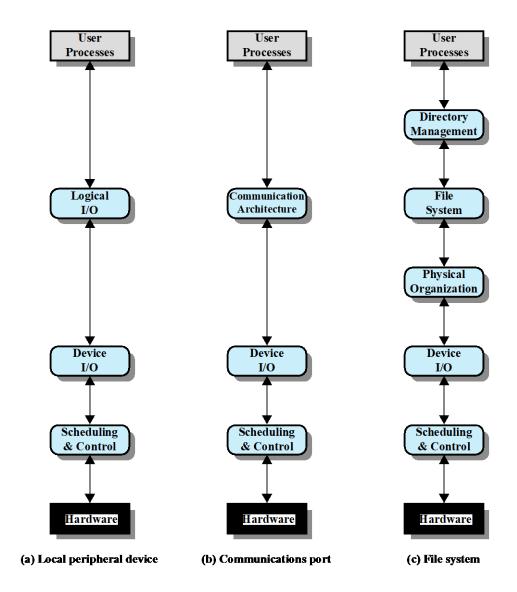



Evolution of the I/O Function

2

3

5

6

• Processor directly controls a peripheral device

- A controller or I/O module is added
- Same configuration as step 2, but now interrupts are employed
- The I/O module is given direct control of memory via DMA
- The I/O module is enhanced to become a separate processor, with a specialized instruction set tailored for I/O
- The I/O module has a local memory of its own and is, in fact, a computer in its own right



I/O Related Programming Techniques

Programmed I/O

- Process is busy-waiting for the operation to complete

while (*IO_STATUS_ADDR != IO_DONE){}

Interrupt-driven I/O

- I/O command is issued
- Processor continues executing instructions
- I/O module sends an interrupt when done

Direct Memory Access (DMA)

- DMA module controls exchange of data between main memory and the I/O device
- Processor interrupted only after entire block has been transferred



Comparison of I/O Techniques

Programmed I/O

- Only when there's no alternative, e.g., timing with very high accuracy Interrupt-driven I/O

- Event-based programming, e.g., user input

Direct memory access

- Data transfer, e.g. disk I/O, graphics operations, network packet processing

	No Interrupts	Use of Interrupts
I/O-to-memory transfer through processor	Programmed I/O	Interrupt-driven I/O
Direct I/O-to-memory transfer		Direct memory access (DMA)



Direct Memory Access


Moving data between main memory and peripherals is a simple operation, but keeps CPU busy

Delegate I/O operation to extra hardware: DMA module

DMA module transfers data directly to or from memory

- "For-loop in hardware"
- Continuous memory regions


When complete, DMA module sends interrupt signal to CPU

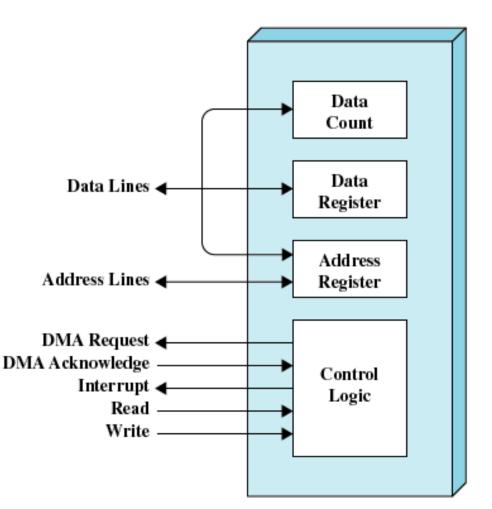



DMA Configurations


Processor DMA I/O . . . I/O Memory




- a) Single-bus, detached DMA
 ➢Simple, but inefficient
 - ➢Requires multiple I/O requests to device
- b) Single-bus, integrated DMA-I/O
 ≻Efficient, but expensive
 >One controller per device (group)

c) I/O bus

- ➤Efficient and less expensive
- ➤Separate bus, one controller

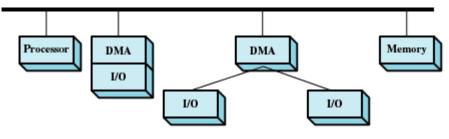

(b) Single-bus, Integrated DMA-I/O

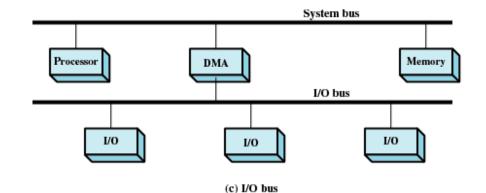



I/O Buffering

Main memory used to temporarily store data


- Mitigates differences in data processing speeds
 - Processes must wait for I/O to complete before proceeding
- Manage pages that must remain in main memory during I/O
 - Buffer must be accessible to low-level drivers and hardware

Approaches (with different buffering strategies)

- Block-oriented
 - Information is stored in fixed sized blocks
 - Transfers are made one block at a time
 - Used for disks and tapes
- Stream-oriented (stream of characters)
 - Transfer information as a stream of bytes
 - Used for terminals, printers, communication ports, mouse and other pointing devices, and most other devices that are not secondary storage




No buffering

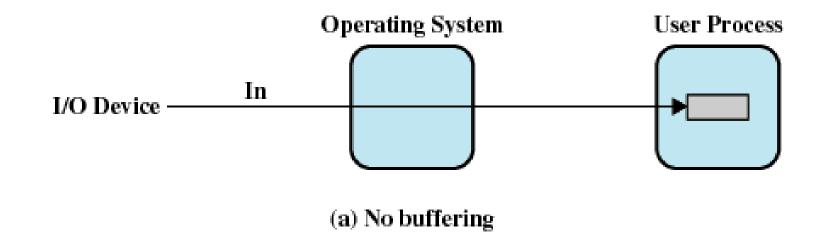



Single buffering


- Block-oriented: User process can process one *fixed-sized* block of data while next block is read in
- Stream-oriented: Process one variable-sized and delimited line at time

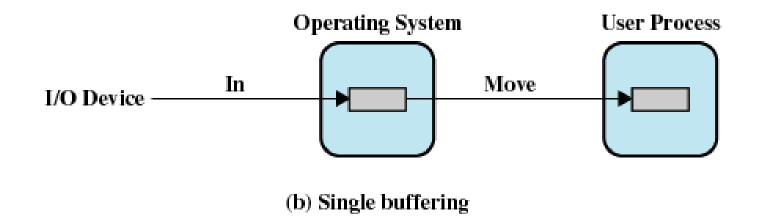



Double buffering

>Process can transfer data to or from one buffer while OS empties or fills other buffer

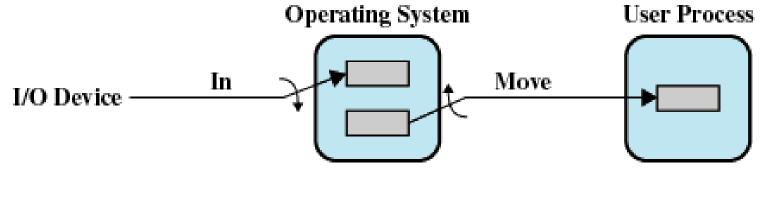


(c) Double buffering



Circular/ring buffering

- Each individual buffer is one unit in circular buffer
- >Used when I/O operation must keep up with process

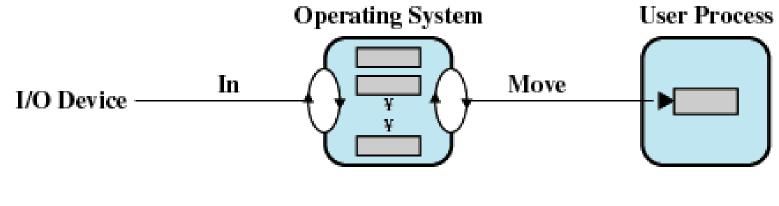

(d) Circular buffering




Questions & Tasks

- If you want to learn more, please check the hidden slides (i.e. slides not covered in the video/lecture but available via the PDF)!
- Programmed I/O (PIO) looks pretty inefficient but are there also situations where PIO has advantages over DMA?
- Point out bottlenecks in the DMA configurations! Are you aware of more efficient solutions? (Hint: check current PC architectures, PCIe etc.)




Disk Drive as Mass Storage



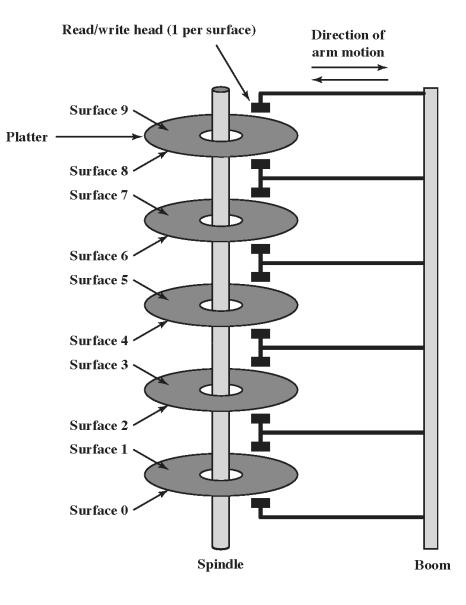



Disk Drive as Mass Storage

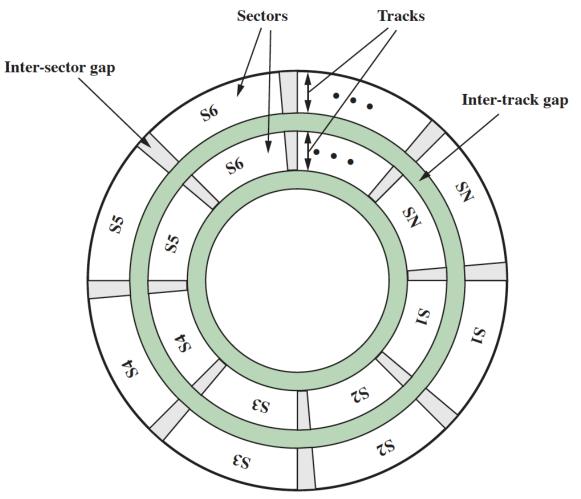




I/O Scheduling

For a single resource there will be a number of I/O requests

- From one or several processes
- Some devices keep internal state, so ordering of I/O requests matters

Example: Disk access

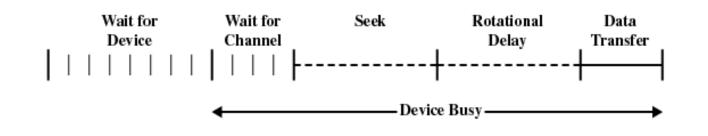



- Access time
 - Sum of seek time and rotational delay
 - Time it takes to get in position to read or write
 - >Seek time is the reason for differences in performance
- Data transfer occurs as the sector moves under the head
- ➢ Reorder I/O requests according to current state of disk



Positioning the Read/Write Heads

When the disk drive is operating, the disk is rotating at constant speed

To read or write the head must be positioned at the desired track and at the beginning of the desired sector on that track

Track selection involves moving the head in a movable-head system or electronically selecting one head on a fixed-head system

On a movable-head system the time it takes to position the head at the track is known as seek time

The time it takes for the beginning of the sector to reach the head is known as rotational delay

The sum of the seek time and the rotational delay equals the access time



Disk Scheduling Algorithms

Name	Description	Remarks				
Selection according to requestor						
RSS	Random scheduling	For analysis and simulation				
FIFO	First in first out	Fairest of them all				
PRI	Priority by process	Control outside of disk queue management				
LIFO	Last in first out	Maximize locality and resource utilization				
Selection according to requested item						
SSTF	Shortest service time first	High utilization, small queues				
SCAN	Back and forth over disk	Better service distribution				
C-SCAN	One way with fast return	Lower service variability				
N-step-SCAN	SCAN of <i>N</i> records at a time	Service guarantee				
FSCAN	N-step-SCAN with <i>N</i> = queue size at beginning of SCAN cycle	Load sensitive				



Disk I/O Scheduling Policies

Example

- Disk with 200 tracks
- Disk request queue has random requests
- Order of requests

55, 58, 39, 18, 90, 160, 150, 38, 184




First-In, First-Out (FIFO)

Processes in sequential order

Fair to all processes


Approximates random scheduling in performance if there are many processes competing for the disk

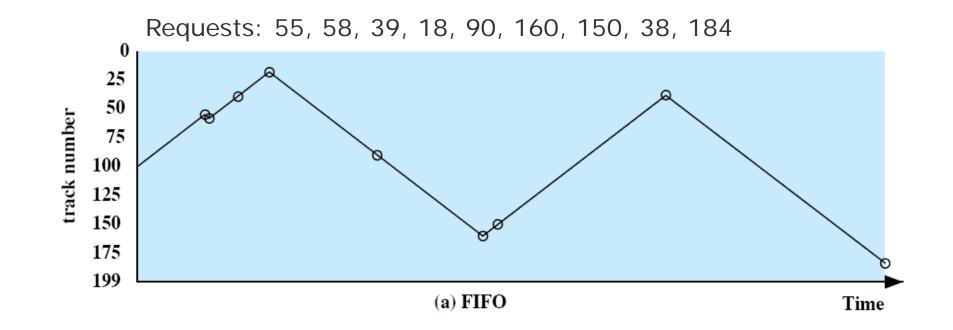



Shortest Service Time First (SSTF)

Select the disk I/O request that requires the least movement of the disk arm from its current position Always choose the minimum seek time

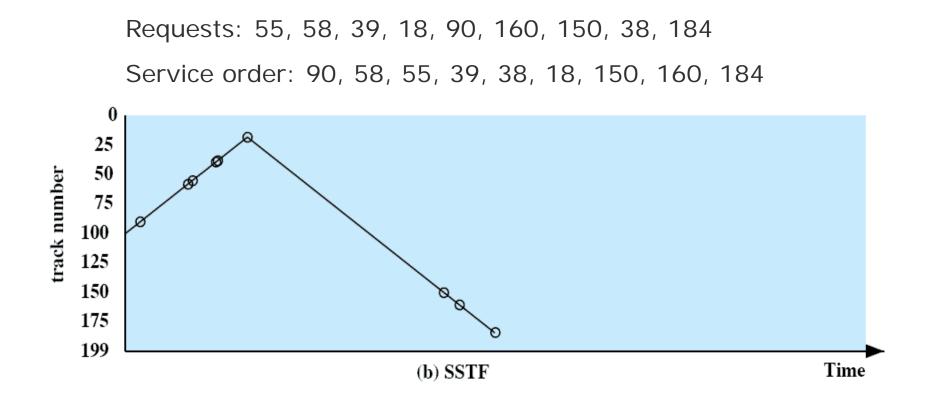




SCAN

Also known as the elevator algorithm

- satisfies all outstanding requests until it reaches the last track in that direction then the direction is reversed Favors jobs whose requests are for tracks nearest to both innermost and outermost tracks

Requests: 55, 58, 39, 18, 90, 160, 150, 38, 184

Service order: 150, 160, 184, 90, 58, 55, 39, 38, 18

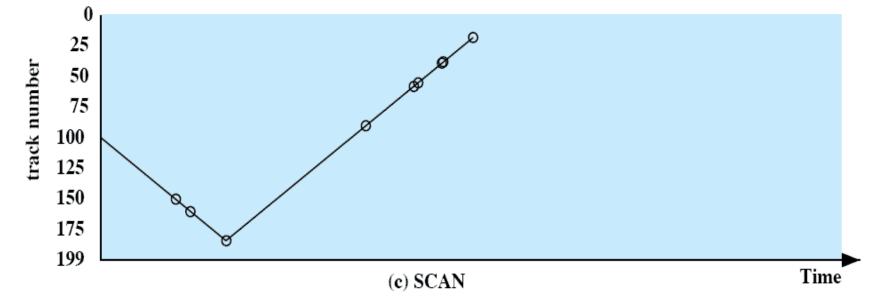




C-SCAN (Circular SCAN)

Restricts scanning to one direction only

When the last track has been visited in one direction, the arm is returned to the opposite end of the disk and the scan begins again

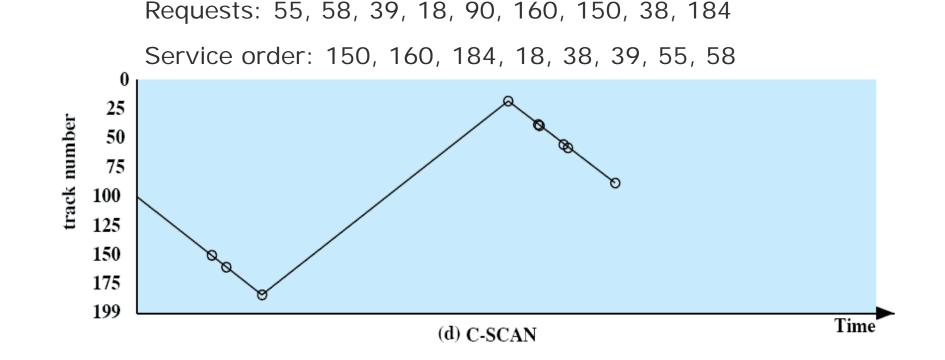



N-Step-SCAN

Segments the disk request queue into subqueues of length N

Subqueues are processed one at a time, using SCAN

While a queue is being processed new requests must be added to some other queue

If fewer than N requests are available at the end of a scan, all of them are processed with the next scan



FSCAN

Uses two subqueues

When a scan begins, all of the requests are in one of the queues, with the other empty

During scan, all new requests are put into the other queue

Service of new requests is deferred until all of the old requests have been processed



Comparison of Disk Scheduling Algorithms


(a) I	FIFO	(b) S	SSTF	(c) S	SCAN	(d) C	-SCAN
	g at track)0)		g at track 00)	(starting at track 100, in the direction of increasing track number)		(starting at track 100, in the direction of increasing track number)	
Next track accessed	Number of tracks traversed	Next track accessed	Number of tracks traversed	Next track accessed	Number of tracks traversed	Next track accessed	Number of tracks traversed
55	45	90	10	150	50	150	50
58	3	58	32	160	10	160	10
39	19	55	3	184	24	184	24
18	21	39	16	90	94	18	166
90	72	38	1	58	32	38	20
160	70	18	20	55	3	39	1
150	10	150	132	39	16	55	16
38	112	160	10	38	1	58	3
184	146	184	24	18	20	90	32
Average seek length	55.3	Average seek length	27.5	Average seek length	27.8	Average seek length	35.8



Disk Cache

Main memory buffer for disk sectors

- Contains copy of subset of sectors on disk
- >Speeds up I/O requests to these sectors

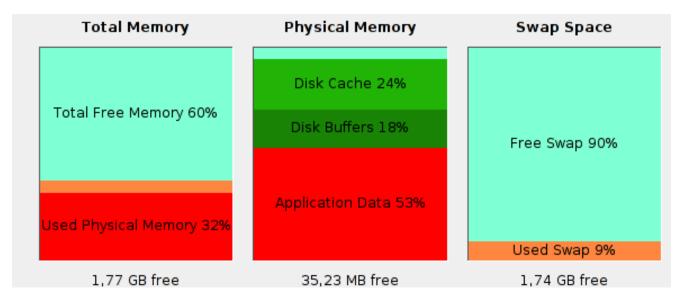

Policies:

- Least Recently Used
 - Block longest in cache with no reference to it is replaced
- Least Frequently Used
 - Block with fewest references is replaced
 - ➢Reference count is misleading for bursty access patterns



RAID

Redundant Array of Independent Disks

Set of physical disk drives viewed by the operating system as a single logical drive

Data are distributed across the physical drives of an array

Redundant disk capacity is used to store parity information



RAID Levels


Category	Level	Description	Disks required	Data availability	Large I/O data transfer capacity	Small I/O request rate
Striping	0	Nonredundant	Ν	Lower than single disk	Very high	Very high for both read and write
Mirroring	1	Mirrored	2 <i>N</i>	Higher than RAID 2, 3, 4, or 5; lower than RAID 6	Higher than single disk for read; similar to single disk for write	Up to twice that of a single disk for read; similar to single disk for write
Parallel access -	2	Redundant via Hamming code	<i>N</i> + <i>m</i>	Much higher than single disk; comparable to RAID 3, 4, or 5	Highest of all listed alternatives	Approximately twice that of a single disk
	3	Bit-interleaved parity	N + 1	Much higher than single disk; comparable to RAID 2, 4, or 5	Highest of all listed alternatives	Approximately twice that of a single disk
Independent access	4	Block-interleaved parity	N + 1	Much higher than single disk; comparable to RAID 2, 3, or 5	Similar to RAID 0 for read; significantly lower than single disk for write	Similar to RAID 0 for read; significantly lower than single disk for write
	5	Block-interleaved distributed parity	N + 1	Much higher than single disk; comparable to RAID 2, 3, or 4	Similar to RAID 0 for read; lower than single disk for write	Similar to RAID 0 for read; generally lower than single disk for write
	6	Block-interleaved dual distributed parity	N + 2	Highest of all listed alternatives	Similar to RAID 0 for read; lower than RAID 5 for write	Similar to RAID 0 for read; significantly lower than RAID 5 for write

N = number of data disks; *m* proportional to log *N*



RAID Level 0

Not a true RAID because it does not include redundancy to improve performance or provide data protection User and system data are distributed across all of the disks in the array Logical disk is divided into strips

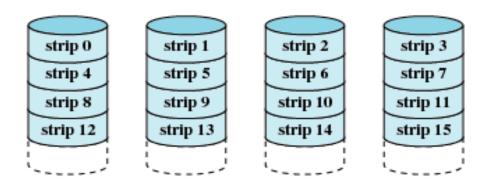

(a) RAID 0 (non-redundant)




RAID Level 1

Redundancy is achieved by the simple expedient of duplicating all the data

There is no "write penalty"

When a drive fails the data may still be accessed from the second drive

Principal disadvantage is the cost

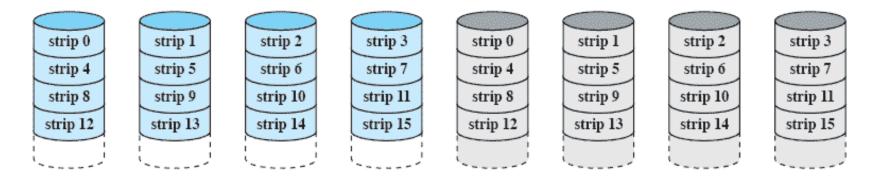

(b) RAID 1 (mirrored)




RAID Level 2

Makes use of a parallel access technique

Data striping is used

Typically a Hamming code is used


Effective choice in an environment in which many disk errors occur

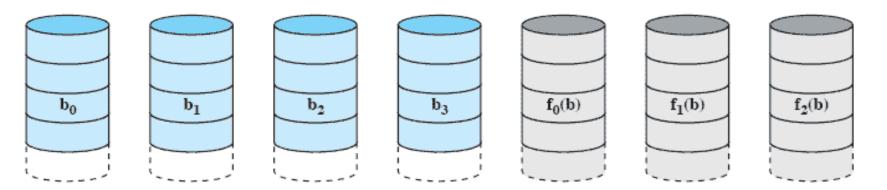

(c) RAID 2 (redundancy through Hamming code)



Requires only a single redundant disk, no matter how large the disk array Employs parallel access, with data distributed in small strips Can achieve very high data transfer rates

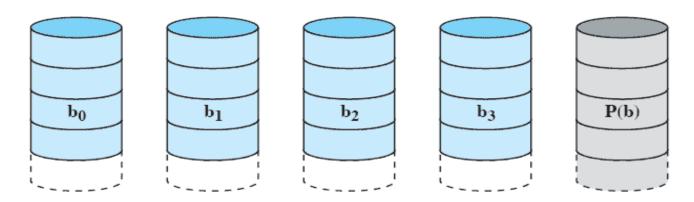


(d) RAID 3 (bit-interleaved parity)



Makes use of an independent access technique

A bit-by-bit parity strip is calculated across corresponding strips on each data disk, and the parity bits are stored in the corresponding strip on the parity disk

Involves a write penalty when an I/O write request of small size is performed

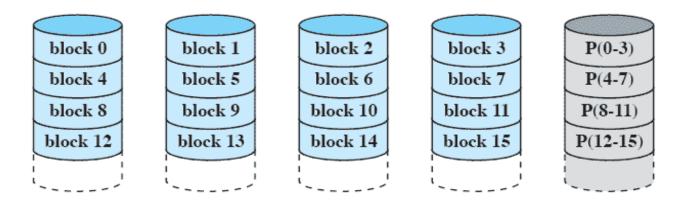


(e) RAID 4 (block-level parity)



Similar to RAID-4 but distributes the parity bits across all disks

Typical allocation is a round-robin scheme

Has the characteristic that the loss of any one disk does not result in data loss

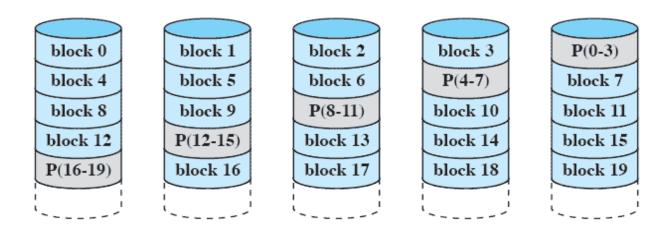


(f) RAID 5 (block-level distributed parity)



Two different parity calculations are carried out and stored in separate blocks on different disks

Provides extremely high data availability

Incurs a substantial write penalty because each write affects two parity blocks

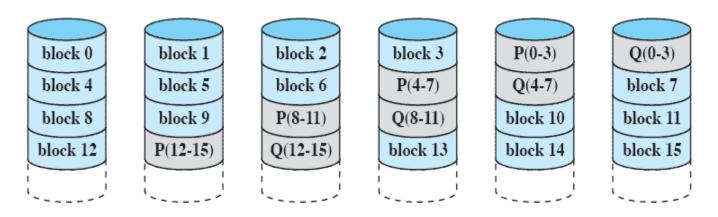

(g) RAID 6 (dual redundancy)




UNIX SVR4 I/O

Each individual device is associated with a special file:

- /dev/dsp0: First sound card
- /dev/hda: IDE, primary master
- /dev/hda1: First partition on /dev/hda
- /dev/tty: Controlling terminal
- ...

Two types of I/O:

- Buffered (default)
- Unbuffered (raw)

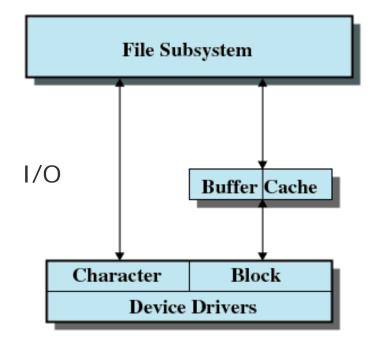



Questions & Tasks


- Compare an SSD with an HD when it comes to I/O scheduling. What are the differences?
- What determines the performance of the different disk scheduling algorithms?
- What are disadvantages of RAID-systems? Where do they have their single point of failure?




Content

- 1. Introduction and Motivation
- 2. Subsystems, Interrupts and System Calls
- 3. Processes
- 4. Memory
- 5. Scheduling
- 6. I/O and File System
- 7. Booting, Services, and Security



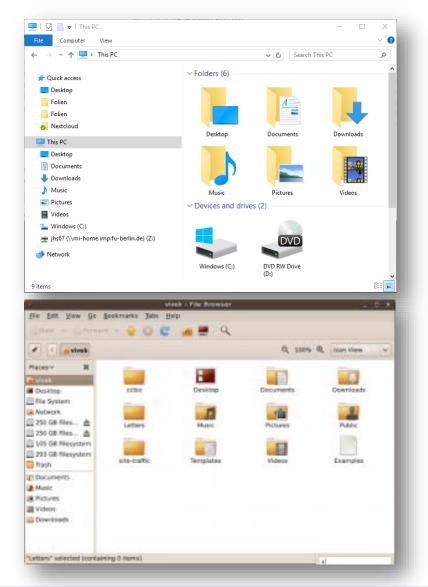

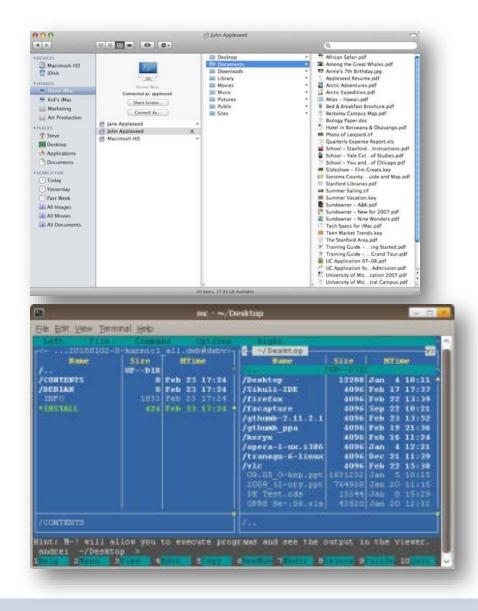



Goals

- Meet data management needs and requirements of user
- Guarantee that data in file is valid (over time)
- Optimize performance
- Provide I/O support for variety of storage device types
- Minimize or eliminate the potential for lost or destroyed data (redundancy)
- Provide a standardized set of I/O interface routines
- Provide I/O support for multiple users
 - Concurrency, access control, etc.



Types of File Systems

Disk File Systems

- Windows: FAT, FAT16, FAT32, NTFS
- Linux: ext, ext2, ext3
- UNIX: UFS, ...
- MAC OS X: HFS, HFS+

Distributed File Systems

- NFS, AFS, SMB

Special Purpose File Systems



Properties

- Long-term existence
- Sharable between processes
- Structure (internal /organizational)

Typical File Operations

- Create Create new file
- Delete Delete existing file
- Open Open new/existing file
- Close Close open file
- Read Read data from open file
- Write data to open file



Minimal User Requirements

6

Each user ...

- should be able to create, delete, read, write and modify files
- may have controlled access to other users' files
- may control what type of accesses are allowed to the files
- should be able to restructure the files in a form appropriate to the problem
- should be able to move data between files
- should be able to back up and recover files in case of damage
- should be able to access his or her files by name rather than by numeric identifier



File System Architecture

Access Method (API)

- Reflect different file structures
- Different ways to access data

Logical I/O

- Enables users to access records
- General-purpose record I/O capability
- Maintains basic data about file

Basic I/O Supervisor


- I/O initiation and termination
- Selection of the I/O device
- Scheduling to optimize performance

Basic File System

- Physical I/O
- Placement of blocks
- Buffers blocks in main memory


Device Drivers

- Communicate with peripheral devices
- Responsible for starting I/O operations on a device
- Processes completion of I/O request

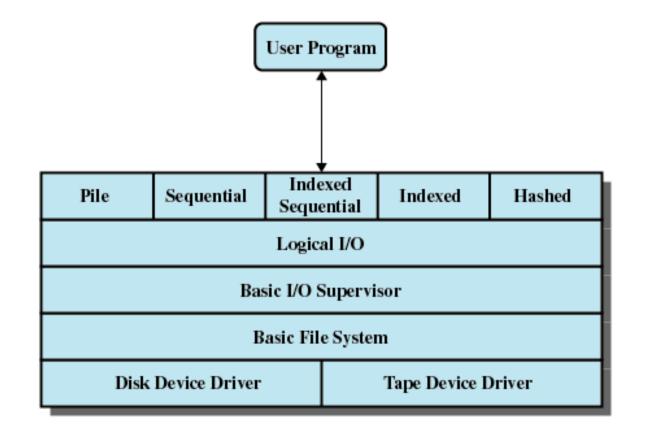




Elements of File Management

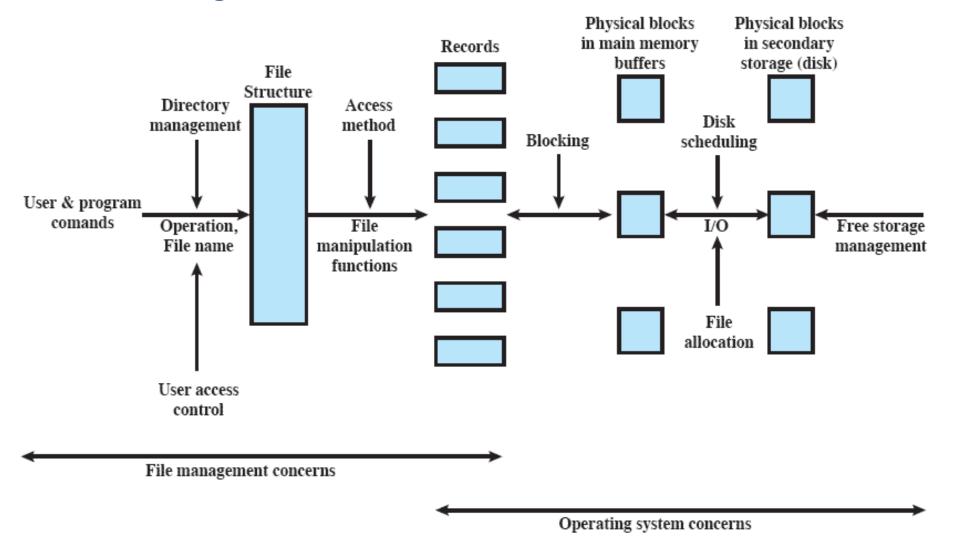



File Organization Types

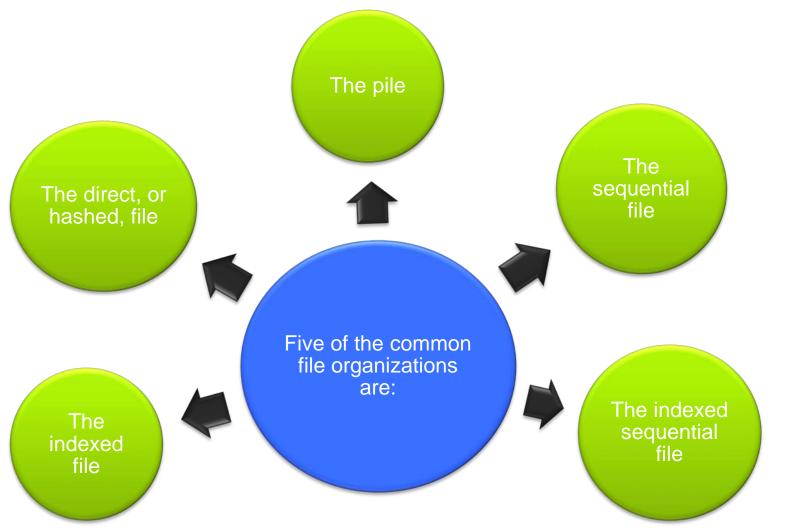




The Pile

Least complicated form of file organization Data are collected in the order they arrive Each record consists of one burst of data Purpose is simply to accumulate the mass of data and save it

Record access is by exhaustive search

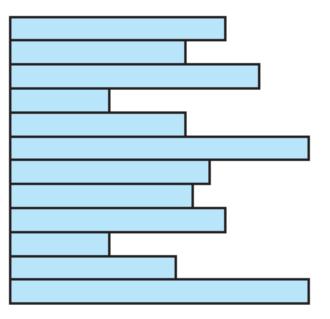

Variable-length records Variable set of fields Chronological order

(a) Pile File



The Sequential File

Most common form of file structure A fixed format is used for records Key field uniquely identifies the record Typically used in batch applications Only organization that is easily stored on tape as well as disk


Fixed-length records Fixed set of fields in fixed order Sequential order based on key field

(b) Sequential File



Indexed Sequential File

- Adds an index to the file to support random access
- Adds an overflow file
- Greatly reduces the time required to access a single record
- Multiple levels of indexing can be used to provide greater efficiency in access

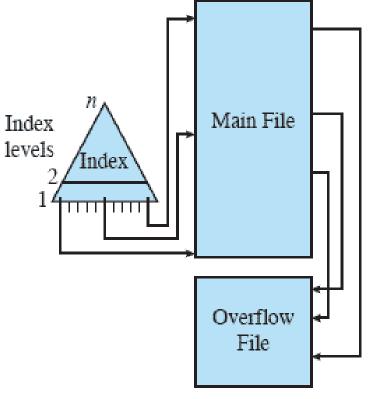


(c) Indexed Sequential File



Indexed File

- Records are accessed only through their indexes
- Variable-length records can be employed
- Exhaustive index contains one entry for every record in the main file
- Partial index contains entries to records where the field of interest exists
- Used mostly in applications where timeliness of information is critical
- Examples would be airline reservation systems and inventory control systems

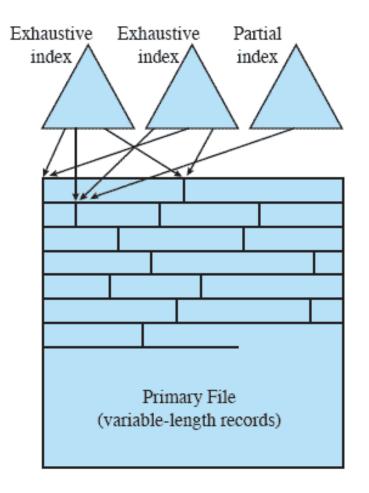

(d) Indexed File



Direct or Hashed File

Access directly any block of a known address Makes use of hashing on the key value Often used where:

- very rapid access is required
- fixed-length records are used
- records are always accessed one at a time

Examples are:

- directories
- pricing tables
- schedules
- name lists



Grades of Performance

	Spa	Space Update		date	Retrieval		
	Attributes		Record Size				
File Method	Variable	Fixed	Equal	Greater	Single record	Subset	Exhaustive
Pile	А	В	Α	E	E	D	В
Sequential	F	А	D	F	F	D	А
Indexed sequential	F	в	В	D	В	D	В
Indexed	В	С	С	С	А	в	D
Hashed	F	В	В	F	В	F	E

 $\approx O(r \log n)$

 $\approx O(r \times n)$

 $\approx O(n)$

Table 12.1 Grades of Performance for Five Basic File Organizations [WIED87]

- A = Excellent, well suited to this purpose $\approx O(r)$
- $B = Good \approx O(o \times r)$
- C = Adequate
- D = Requires some extra effort
- E = Possible with extreme effort
- $F = Not reasonable for this purpose \approx O(n^{>1})$

where

- r = size of the result
- o = number of records that overflow
- n = number of records in file



Operations Performed on a Directory

To understand the requirements for a file structure, it is helpful to consider the types of operations that may be performed on the directory:







File Directories

Contains information about files

- Attributes, e.g., read/write/executable bits, access time
- Ownership, e.g., user/group or Access Control List (ACL)
- Location with regard to logical structure of medium

Directory itself may be implemented as file owned by operating system

Provides mapping between file names and files themselves

- "inodes" in Unix

>One file can have multiple names ("hard links")

Structure


- List of entries, one for each file
- Sequential file with name of file serving as key
- Initially no support for organizing files (except for naming)
 - Forces user to be careful not to use the same name for two different files



Multi-Level Directories

Two-level Scheme (historical)

- One directory for each user and a master directory
- Master directory contains entry for each user
- Each user directory is a simple list of files for that user
- Provides no help in structuring collections of files

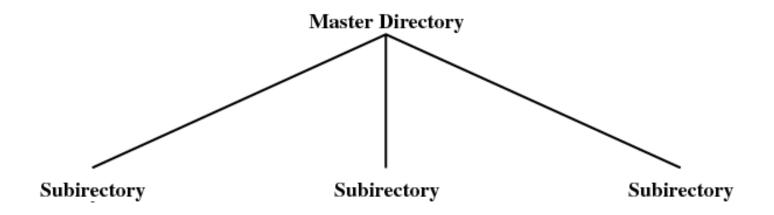




Multi-Level Directories

Hierarchical / Tree-Structure

- Master directory with user directories underneath it
- Each user directory may have subdirectories and files as entries
- Some operating systems use multiple trees with own identifiers, e.g., drive letters (A:, C:)

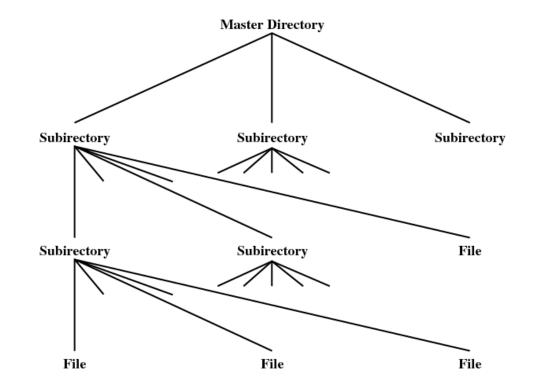




Hierarchical/Tree-Structured Directory

Files are located by following path from root (master) directory down various branches *≻Pathname* of file

Supports several files with same file name as long as path names differ


Per-process current directory is working directory

Files are referenced relative to current working directory (CWD)

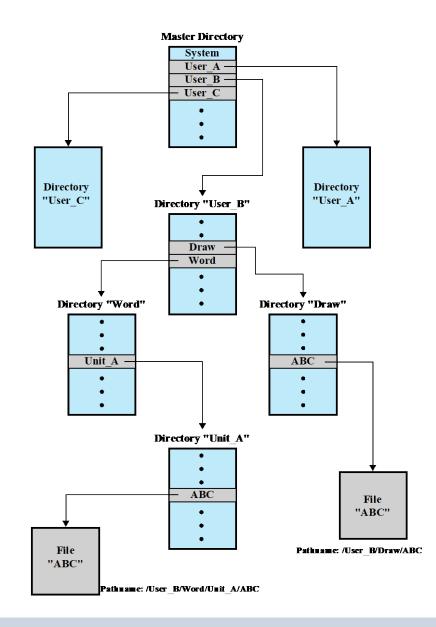



File Sharing

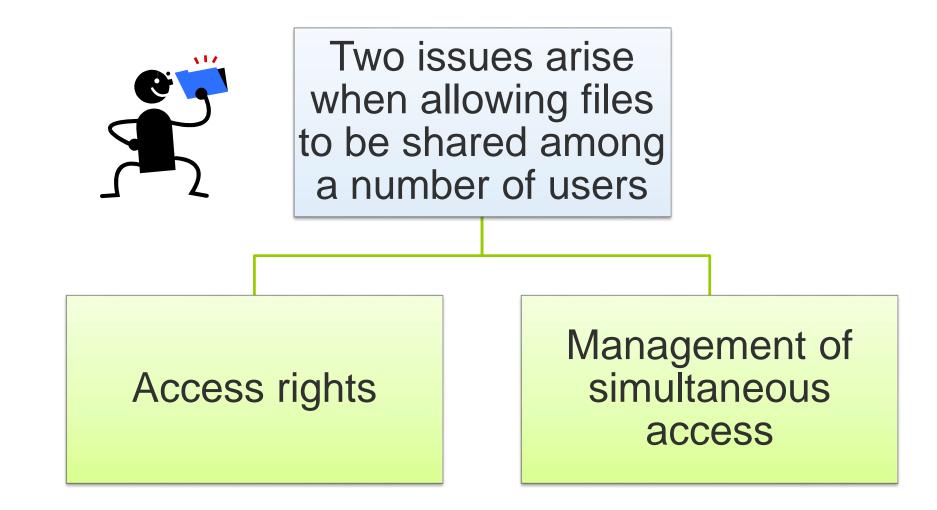



Access Rights

None

- User may not know of existence of file
- User is not allowed to read user directory that includes file Knowledge
- User can only determine that file exists and who its owner is Execution
- User can load and execute program but cannot copy it

Reading

- User can read file for any purpose, including copying and execution

Appending

- User can add data to file but cannot modify or delete any of its contents

Updating


- User can modify, delete and add to file's data
- Includes creating file, rewriting it and removing all or part of its data
- Changing protection
- User can change access rights granted to other users Deletion
 - User can delete a file

Owner

- All rights previously listed
- Grant rights to others using classes of users:
 - Specific user
 - User groups
 - Everybody
- Complex access policies implemented with Access Control Lists (ACLs)
- > Watch out for semantic differences between files and directories!



User Access Rights

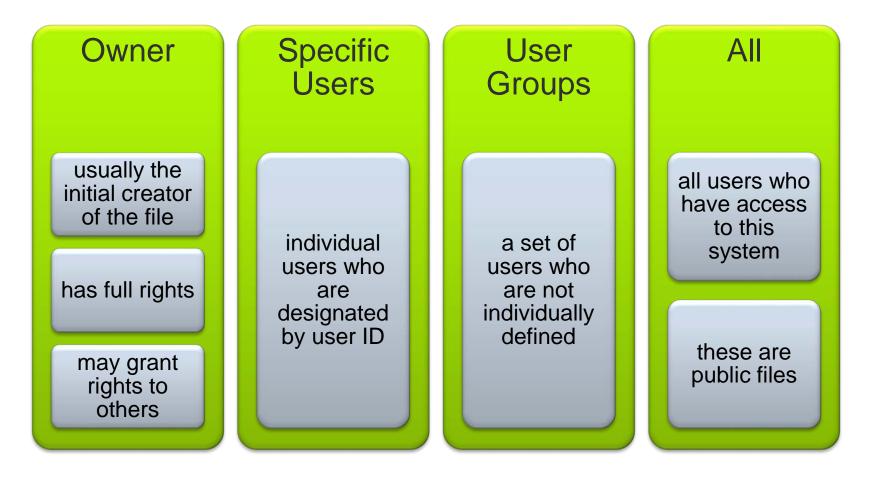



Access Matrix

The basic elements are

- subject: an entity capable of accessing objects
- object: anything to which access is controlled
- access right: the way in which an object is accessed by a subject

	File 1	File 2	File 3	File 4	Account 1	Account 2
User A	Own R W		Own R W		Inquiry Credit	
User B	R	Own R W	w	R	Inquiry Debit	Inquiry Credit
User C	R W	R		Own R W		Inquiry Debit


(a) Access matrix



Access Control Lists

A matrix may be decomposed by columns, yielding access control lists

The access control list lists users and their permitted access rights

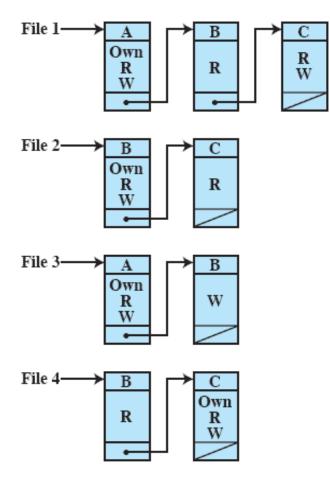


(b) Access control lists for files of part (a)



Capability Lists

Decomposition by rows yields capability tickets

A capability ticket specifies authorized objects and operations for a user

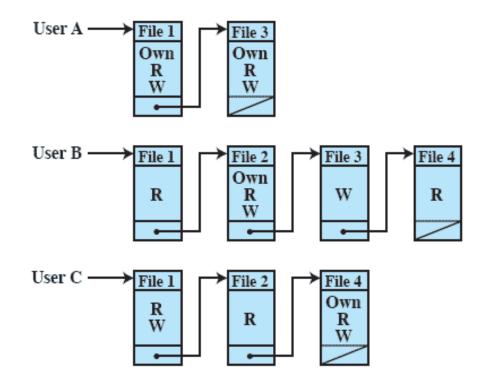

(c) Capability lists for files of part (a)




Questions & Tasks

- Check out the file system on your computer on the command line and using a window-based UI! How do you set certain access rights? Encryption?
- Can a computer use different file systems at the same time for different storage devices?
- We are typically very much used to tree-structures for file systems. Are there alternatives? What are advantages/disadvantages?
- What is a link/shortcut?



Secondary Storage Management

Secondary storage space must be allocated to files Must keep track of space available for allocation

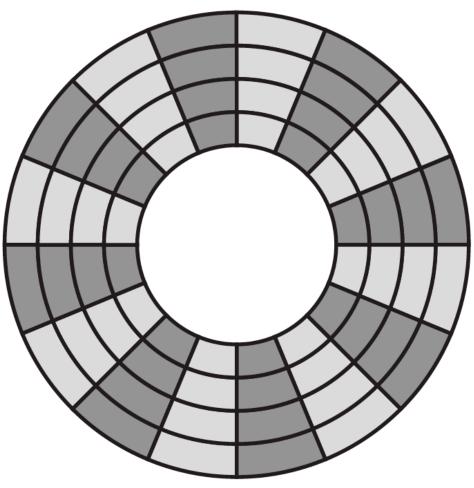



File Allocation

On secondary storage, a file consists of a collection of blocks

The operating system or file management system is responsible for allocating blocks to files

The approach taken for file allocation may influence the approach taken for free space management

Space is allocated to a file as one or more portions (contiguous set of allocated blocks)

File allocation table (FAT)

- data structure used to keep track of the portions assigned to a file



Preallocation vs Dynamic Allocation

A preallocation policy requires that the maximum size of a file be declared at the time of the file creation request

For many applications it is difficult to estimate reliably the maximum potential size of the file

- Tends to be wasteful because users and application programmers tend to overestimate size

Dynamic allocation allocates space to a file in portions as needed



Secondary Storage Management

File Allocation Methods

Contiguous allocation

- Single set of blocks is allocated to a file at time of creation
- Single entry in file allocation table (starting block, length of file)
- >Incurs fragmentation; changing size of a file is expensive

Chained allocation

- Allocation on basis of individual block
- Each block contains a pointer to next block in chain
- Single entry in file allocation table (starting block, length of file)
- >Seeking within file (random access) is expensive


Indexed allocation

- File allocation table contains a separate one-level index for each file
- The index has one entry for each portion allocated to file
- The file allocation table contains block number for index
- >Avoids problems mentioned above, incurs some storage overhead



Contiguous File Allocation


- A single contiguous set of blocks is allocated to a file at the time of file creation
- Preallocation strategy using variable-size portions
- Is the best from the point of view of the individual sequential file

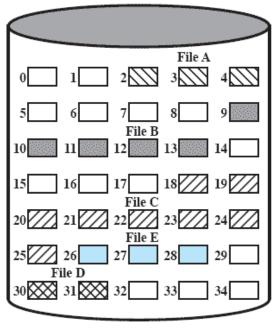

File Allocation Table				
File Name Start Block Length				
File A	2	3		
File B	9	5		
File C	18	8		
File D	30	2		
File E	26	3		

>External fragmentation on disk



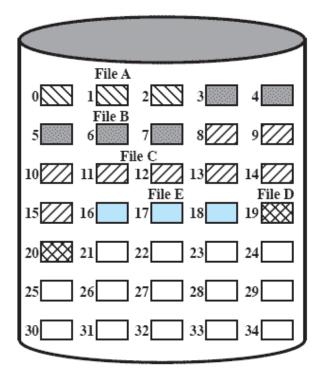

File Allocation Table


File Name	Start Block	Length
File A	0	3
File B	3	5
File C	8	8
File D	19	2
File E	16	3

Contiguous File Allocation (After Compaction)



Chained Allocation

- Allocation is on an individual block basis
- Each block contains a pointer to the next block in the chain
- The file allocation table needs just a single entry for each file
- No external fragmentation to worry about
- Best for sequential files

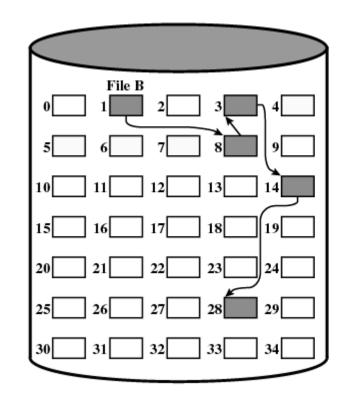


File	Allocation	Table

File Name	Start Block	Length
File B	1	5

Low random access performance



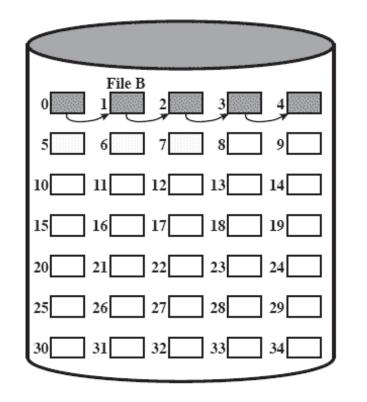


File Allocation Table				
File Name Start Block Length				
•••	•••	•••		
File B	0	5		
•••	•••	•••		


Chained Allocation After Consolidation



Indexed Allocation with Block Portions

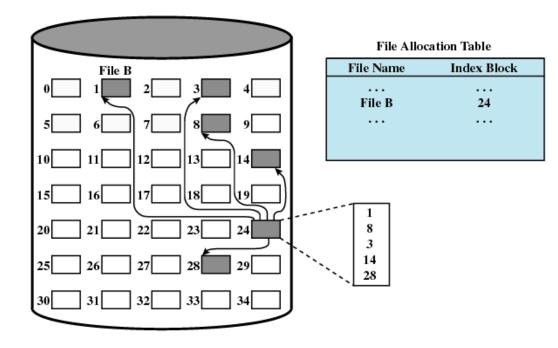

Index Allocation with Variable-Length Portions

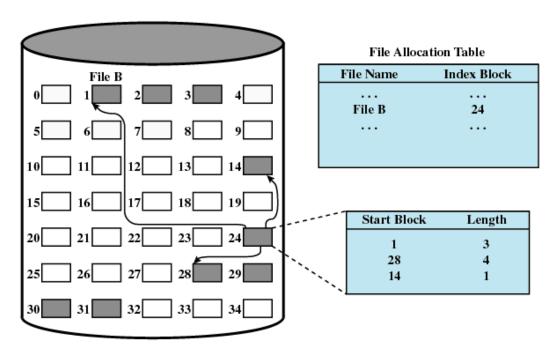

➢Indexing overhead

≻Good compromise



File Allocation Methods

	Contiguous	Chained	Indexed	
Preallocation?	Necessary	Possible	Possible	
Fixed or variable size portions?	Variable	Fixed blocks	Fixed blocks	Variable
Portion size	Large	Small	Small	Medium
Allocation frequency	Once	Low to high	High	Low
Time to allocate	Medium	Long	Short	Medium
File allocation table size	One entry	One entry	Large	Medium



Free Space Management

Just as allocated space must be managed, so must the unallocated space To perform file allocation, it is necessary to know which blocks are available A **disk allocation table** is needed in addition to a file allocation table





Bit Tables

This method uses a vector containing one bit for each block on the disk

Each entry of a 0 corresponds to a free block, and each 1 corresponds to a block in use

Advantages

- works well with any file allocation method
- it is as small as possible



Chained Free Portions

The free portions may be chained together by using a pointer and length value in each free portion Negligible space overhead because there is no need for a disk allocation table Suited to all file allocation methods

Disadvantages

- leads to fragmentation
- every time you allocate a block you need to read the block first to recover the pointer to the new first free block before writing data to that block



Indexing

Treats free space as a file and uses an index table as it would for file allocation For efficiency, the index should be on the basis of variable-size portions rather than blocks This approach provides efficient support for all of the file allocation methods





Free Block List

Depending on the size of There are two effective the disk, either 24 or 32 techniques for storing a Each block is assigned a bits will be needed to small part of the free number sequentially block list in main store a single block number memory: the size of the free the list can be treated the list of the numbers block list is 24 or 32 as a push-down stack of all free blocks is times the size of the with the first few maintained in a corresponding bit table thousand elements of reserved portion of the and must be stored on the stack kept in main disk disk memory

the list can be treated as a FIFO queue, with a few thousand entries from both the head and the tail of the queue in main memory




Questions & Tasks

- Is secondary storage management only needed for hard disks? What about an SSD?
- What are advantages and disadvantages of contiguous allocation? When/where can it be used?
- What happens with indexed allocation when the index does not fit into a block?



UNIX File Management

In the UNIX file system, six types of files are distinguished:

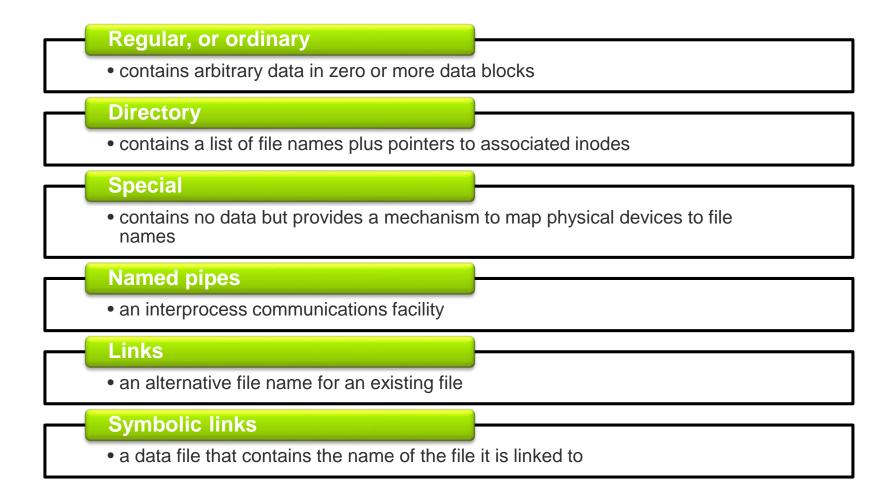



Inodes

All types of UNIX files are administered by the OS by means of **inodes**

An inode (index node) is a control structure that contains the key information needed by the operating system for a particular file


Several file names may be associated with a single inode

- an active inode is associated with exactly one file
- each file is controlled by exactly one inode

File Mode	16-bit flag that stores access and execution permissions associated with the file.					
	12-14 File type (regular, directory, character or block special, FIFO pipe					
	9-11 Execution flags 8 Owner read permission					
	7 Owner write permission					
	6 Owner execute permission					
	5 Group read permission					
	4 Group write permission					
	3 Group execute permission					
	2 Other read permission					
	1 Other write permission					
	0 Other execute permission					
Link Count	Number of directory references to this inode					
Owner ID	Individual owner of file					
Group ID	Group owner associated with this file					
File Size	Number of bytes in file					
File Addresses	39 bytes of address information					
Last Accessed	Time of last file access					
Last Modified	Time of last file modification					
Inode Modified	Time of last inode modification					



FreeBSD Inode and File Structure

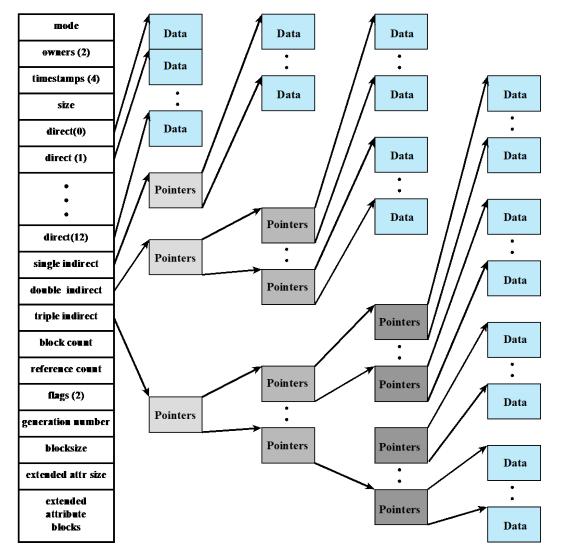

Inode



File Allocation

File allocation is done on a block basis

Allocation is dynamic, as needed, rather than using preallocation

An indexed method is used to keep track of each file, with part of the index stored in the inode for the file

In all UNIX implementations the inode includes a number of direct pointers and three indirect pointers (single, double, triple)



UNIX Directories and Inodes

Directories are structured in a hierarchical tree

Each directory can contain files and/or other directories

A directory that is inside another directory is referred to as a subdirectory


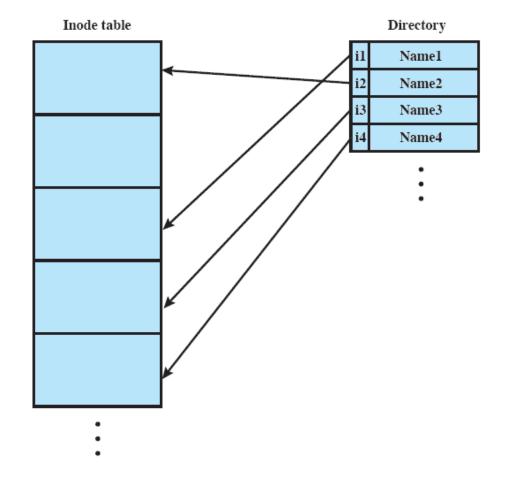


Figure 12.15 UNIX Directories and Inodes




Volume Structure

A UNIX file system resides on a single logical disk or disk partition and is laid out with the following elements:

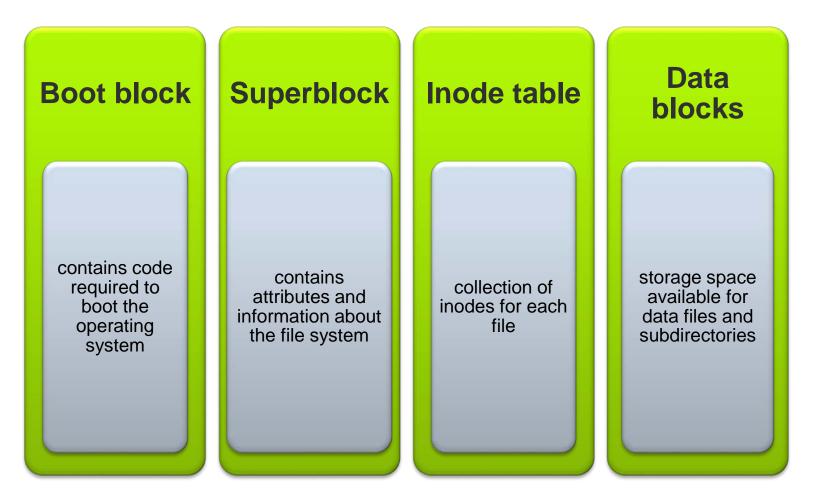



UNIX File Access Control

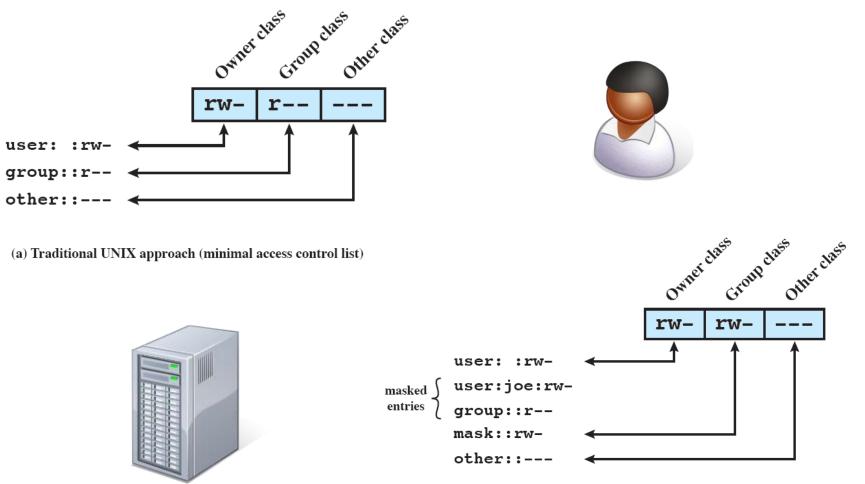

(b) Extended access control list



UNIX File Access Control

permissions	user	group	size	date			file/directory
							1
drwxr-xr-x	2 paul	users	1024	Jan	2 2	23:50	•
drwxr-xr-x	6 root	root	1024	Jan	2 2	22:51	
drwxr-xr-x	3 paul	users	1024	Jan	8 1	11:42	grassdata
lrwxrwxrwx	1 paul	users	13	May	6	1998	latex -> /d2/lt
drwx	2 paul	users	1024	Mar	8 1	17:30	mail
drwx	2 paul	users	1024	Feb	4 0	01:09	projects
-rw-rr	1 paul	users	844344	Dec	9	1998	nations.ps
-rw-rw-r	1 paul	users	21438	Mar	2 2	21:47	ps4mf.txt
d : directory - : file 1 : link (to other file/directory)				w:wri x:exe	ite pe ecute	ermissio ermissio e permi sion no	on ission (programm)



Access Control Lists in UNIX

FreeBSD allows the administrator to assign a list of UNIX user IDs and groups to a file

Any number of users and groups can be associated with a file, each with three protection bits (read, write, execute)

A file may be protected solely by the traditional UNIX file access mechanism

FreeBSD files include an additional protection bit that indicates whether the file has an extended ACL




Linux Virtual File System (VFS)

Presents a single, uniform file system interface to user processes


Defines a common file model that is capable of representing any conceivable file system's general feature and behavior

Assumes files are objects that share basic properties regardless of the target file system or the underlying processor hardware

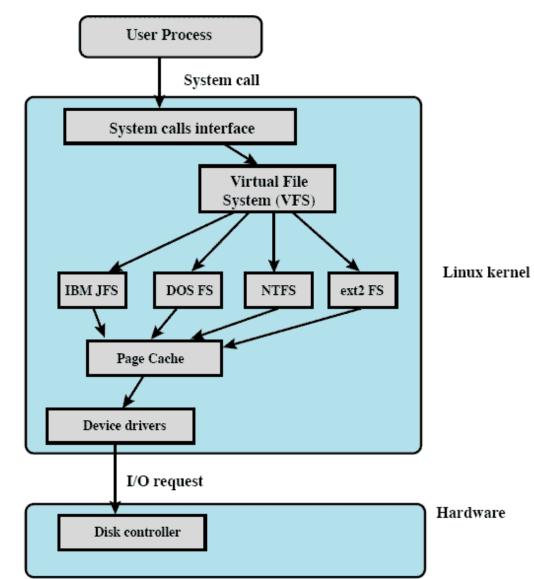



The Role of VFS within the Kernel

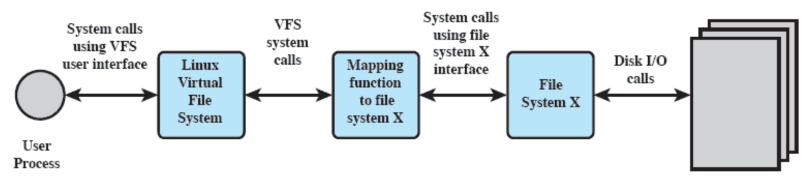

Files on secondary storage maintained by file system X




Example: Linux VFS/Ext2

The virtual file system is a layer between the kernel and the file system code

Manages all the different file systems that are mounted

The real file systems are either built into the kernel itself or are built as loadable modules

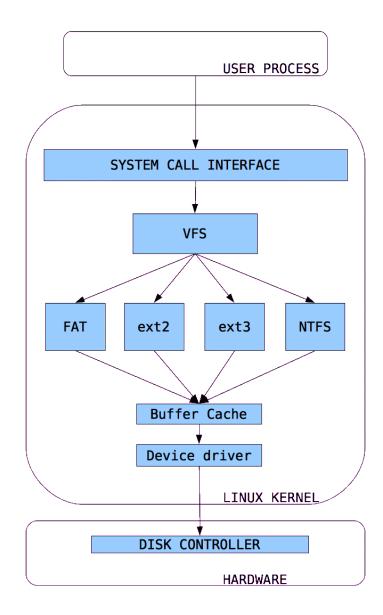




Ext2: Inodes

Basic concept of the Ext2 system (and of all Unix file systems) is the structure called **inode** (index node)

A file is represented by one inode

The length of files is variable but all inodes are of the same length (128 Byte)

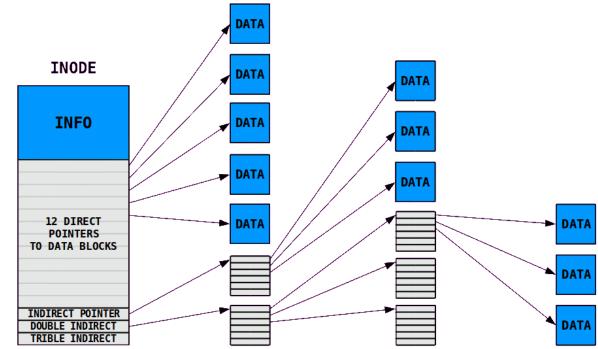

Smaller files are more quickly accessed than larger files



Ext2: Directories

A directory is a file which is formatted with a special format - a list of directory entries

➢Also a directory has an inode

Directory entries are of variable length

File names of varying length are supported

An entry consists of

- Inode number
- Entry length
- Name length
- File name

 θ
 15
 55

 i5
 16
 5
 file1
 i6
 40
 14
 very_long_name
 i7
 12
 02
 f2

 <

The first two entries for every directory are always the standard "." and ".." ("this directory" and "the parent directory")

The inode number of the root directory is stored in the super block so the system can access it directly at any time



Ext2: Blocks and Block Groups

A block is the smallest unit that can be allocated on an Ext2 partition

The blocks are grouped into block groups of the same size

BOOT	BLOCK	BLOCK	BLOCK	BLOCK
SECTOR	GROUP 0	GROUP 1	GROUP 2	 GROUP N

If possible, data blocks for a file are allocated in the same group as its inode >Related data is kept physically close, seek time is reduced

Each group stores a copy of critical administrative information

Data security is increased

All block groups have the same size and are stored sequentially

➤The location of a block group can be derived from its index



Ext2: Block Groups

Super block


- Description of basic size and shape of the file system
 - information that allows to use and maintain the system

Group descriptors

- Position of block bitmap, inode bitmap and inode table, number of free data blocks, inodes and directories
 - information used when new data blocks are allocated


Copies in all block groups

>Only super block and group descriptors in block group 0 are actually used, the remaining copies are only used in case of file system corruption

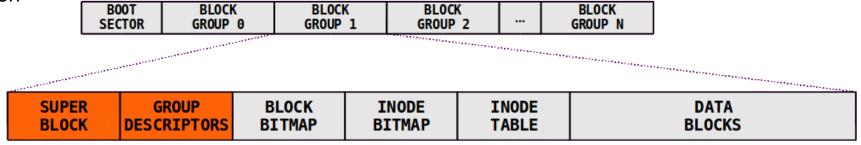



Ext2: Block Groups

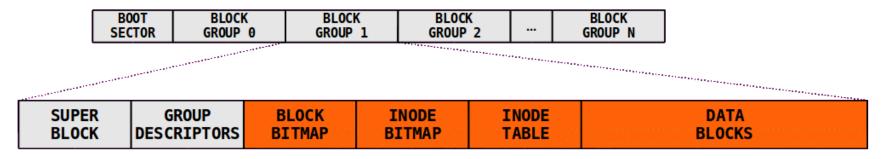

Block bitmap/ inode bitmap	One bit per block/inode, indicates whether the block/inode is used or free
Inode table	A predefined number of inodes
Data blocks	Blocks storing the actual data



Related System Calls (Linux)

```
int open(const char *pathname, int flags)
- Open file at pathname with options flags and return file descriptor
int close(int fd)
- Close file descriptor fd
```

```
ssize_t read(int fd, void *buf, size_t count)
ssize_t write(int fd, const void *buf, size_t count)
- Read/write data at buf with count bytes from/to file descriptor fd
off_t lseek(int fd, off_t offset, int whence)
- Seek is change current "cursor position" in file descriptor fd by offset bytes in relation to whence
```

```
- Seek, i.e. change current "cursor position", in file descriptor fd by offset bytes in relation to whence (SEEK_SET, SEEK_CUR, SEEK_END)
```

```
int fcntl(int fd, int cmd)
int fcntl(int fd, int cmd, long arg)
int fcntl(int fd, int cmd, struct flock *lock)
Deferme energies and on file descriptor fd on looking to protects energy
```

```
    Performs operation cmd on file descriptor fd, e.g. locking to protects against concurrent access, signaling on I/O, ...
    >Is this a well-designed interface?
```



Content

- 1. Introduction and Motivation
- 2. Subsystems, Interrupts and System Calls
- 3. Processes
- 4. Memory
- 5. Scheduling
- 6. I/O and File System
- 7. Booting, Services, and Security